




We Make Modern
Life Possible

EARTHING AND SHORT CIRCUITING CABLES AND BARE WIRES

Copper wire braidings, flat

Bare copper wire braidings, flat

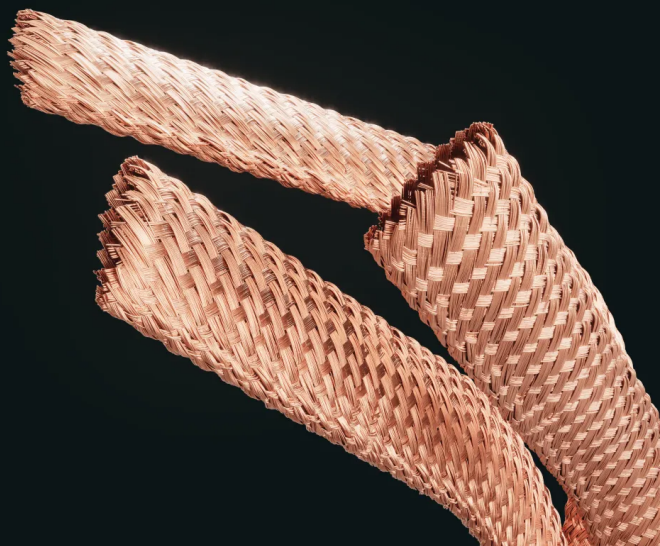

TECHNICAL DATA



Standard
TS ICS 43-2020

DESIGN



1

Bare copper wire or stranded bare copper wire braiding
(flat)

Single wire diameter (mm)	Conductor cross section (mm ²)	Width of flattened conductor (mm)	Height of flattened conductor (mm)	Cu-value (kg/km)
0.07	6	8.5	0.9	58
0.07	10	11.5	1.2	96
0.07	16	15.2	1.4	154
0.07	20	16.8	1.7	192
0.07	25	19	1.9	240
0.07	35	21.5	2.4	336
0.1	10	11.2	1.3	96
0.1	16	15.5	1.5	154
0.1	25	20	2	240
0.1	35	24	2.2	336
0.1	50	28.5	2.8	480
0.2	25	22	1.6	240
0.2	35	24.5	2.4	336
0.2	50	31	2.7	480
0.2	70	35	3.8	672

CONTACT PERSON

Dipl. Ing. Peter Tomka

+421 37 6969631
peter.tomka@ics-cables.sk