

RAILWAY SIGNALLING AND TELECOMMUNICATIONS CABLES

PE-ALT-CLT Balise

Railway signalling cable, unscreened,
armoured



TECHNICAL DATA



Standard
SBB-Standard CFF FFS 3001.52.2000



Test Voltage
core/core 2500 V / 50 Hz
core/screen 2500 V / 50 Hz



Rated Voltage
420 Veff (AC)
600 V (DC)



Bending radius (min.)
20 x ϕ of cable




Core identification
SBB-Standard CFF FFS 3001.52.2000



Temperature range
Laying temperature: min. -5°C
Operating temperature: -40°C up to 70°C

DESIGN

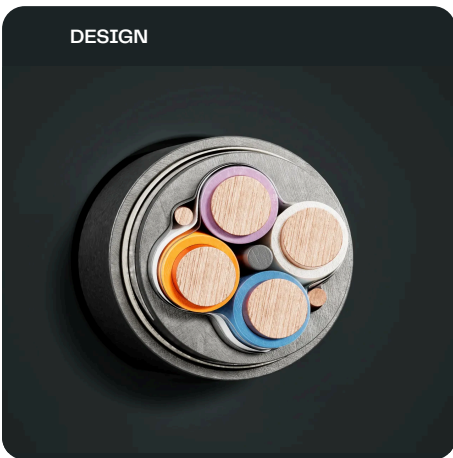

- 1 Copper conductor, round solid (RE)
- 2 Core insulation (PE), cores star quaded and quads stranded in layers
- 3 Inner covering (plastic tape)
- 4 Sheath (PE, black)
- 5 Armouring (two layers galvanized steel tapes)
- 6 Sheath (PE black, UV-resistant)

Electrical parameters

Loop resistance max	Ω/km	19.8
Insulation resistance, min. at 20 °C	$\text{M}\Omega/\text{km}$	10000
Mutual capacitance, max. (+/- 15%)	nF/km	42.3
Capacitance unbalance at 800 Hz, k1 max.	pF/km	240
Capacitance unbalance earth/core at 800 Hz, ea1, ea2 max.	pF/km	640
Characteristic impedance at 0,56/0,80 MHz, max. (+/- 10%)	Ω	120
Characteristic impedance at 1,80 MHz, max. (+/- 5%)	Ω	120
Attenuation at 8,82 kHz, max.	$\text{dB}/100 \text{ m}$	0.08
Attenuation at 0,56 MHz, max.	$\text{dB}/100 \text{ m}$	0.4
Attenuation at 0,80 MHz, max.	$\text{dB}/100 \text{ m}$	0.5
Attenuation at 1,80 MHz, max.	$\text{dB}/100 \text{ m}$	0.8

Number of quads x conductor diameter	Outer diameter appr. (mm)	Total weight appr. (kg/km)
1 x 4 x 1.53	16.5	332

CONTACT PERSON

Ing. Štěpán Laštůvka
Product Supervisor
+420 732 912 682
stepan.lastuvka@prakab.com

