


S-YY

PVC/PVC railway signalling cable, unscreened



TECHNICAL DATA

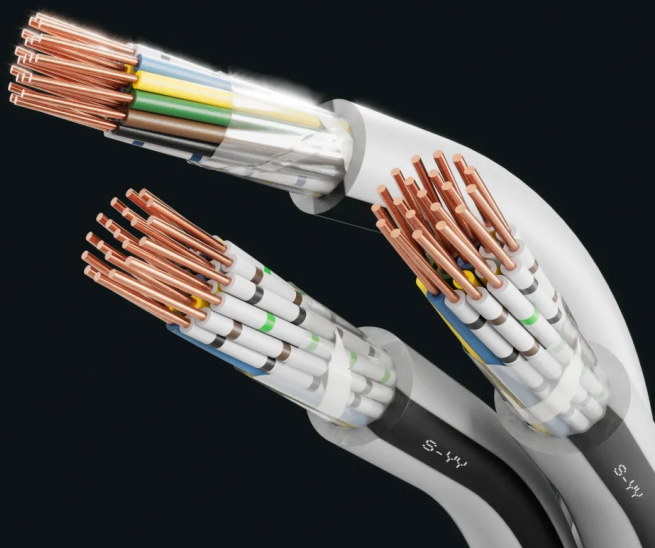

Standard
ÖVE-K 12



Test Voltage
core/core 2,5 kV / 50 Hz



Bending radius (min.)
7,5 x Ø of cable



Fire properties
EN 60332-1-2: flame retardant



Core identification
ÖVE-K 12



Temperature range
Laying temperature: min. -5°C
Operating temperature: -30°C up to 60°C
Conductor temperature: max. 70°C

DESIGN



1

Copper conductor, round solid (RE)

2

Core insulation (PVC)

3

Inner covering (plastic tape)

4

Sheath (PVC grey RAL 7035 with black stripes)

Number of cores x nominal cross-section (mm ²)	Standard lengths/packing (m)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
30 x 0,6	1000 T	10,7	176
60 x 0,6	1000 T	14,9	347
10 x 1	1000 T	9,9	148
30 x 1	1000 T	14,9	394
20 x 0,6	1000 T	9,1	124

CONTACT PERSON

Ing. Štěpán Laštůvka
 Product Supervisor
 +420 732 912 682
stepan.lastuvka@prakab.com

