




We Make Modern
Life Possible

POWER CABLES AND OVERHEAD LINES 0.6/1 kV

1-CYKY

PVC/PVC copper energy cables

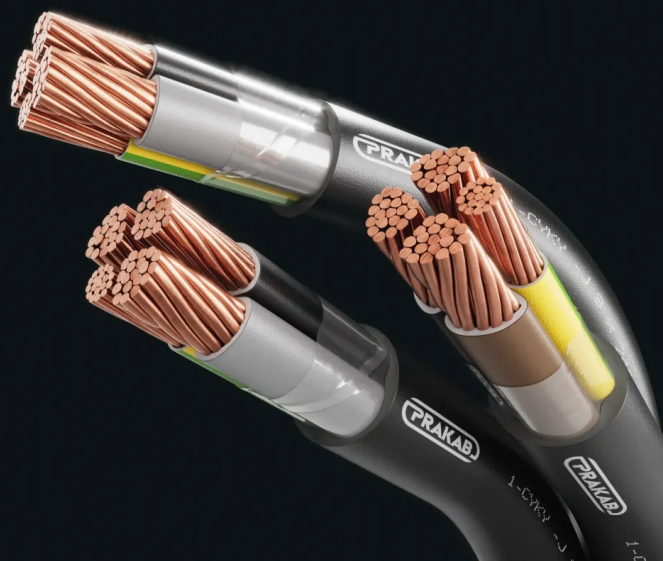

TECHNICAL DATA



Standard
ČSN 347659-3P



Rated Voltage
0.6/1 kV



Test Voltage
core/core 4 kV / 50 Hz



Bending radius (min.)
12 x $\varnothing$ of cable up to 15 mm
15 x $\varnothing$ of cable over 15 mm



Core identification
ČSN 33 0166 ed. 2



Fire properties
ČSN EN 60332-1-2: self-extinguishing
OPR classification: Eca



Certificate
EZÚ Czech Republic



Temperature range
Laying temperature: min. -5°C
Operating temperature: -50°C up to 70°C
Conductor temperature: max. 70°C
Short circuit temperature: max. 160°C

DESIGN



Copper conductor, round solid (RE), round stranded (RM)
resp. sector-shaped stranded (SM)



Core insulation (PVC)



Inner covering (EPDM or plastic tape)



Sheath (PVC black, UV-resistant)

Number of cores x nominal cross-section (mm ²)	Max. conductor resistance (Ω/km)	Current rating in the earth (A)	Current rating in the air (A)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
4 x 10 RE	1.83	78	59	16.1	700
4 x 16 RE	1.15	101	78	18.6	970
4 x 25 RM	0.727	132	105	23.8	1515
5 x 25 RM	0.727	92	105	26.1	1825
3 x 35 + 25 RM/RM	0.524 / 0.727	159	129	26.2	1810
4 x 35 RM	0.524	159	129	26.2	1955
5 x 35 RM	0.524	110	129	28.8	2370
3 x 50 + 35 SM/RM	0.387 / 0.524	188	157	30.4	2060
4 x 50 RM	0.387	188	157	31.3	2600
4 x 50 SM	0.387	188	157	30.4	2190
5 x 50 RM	0.387	130	109	35.1	3180
3 x 70 + 50 SM/RM	0.268 / 0.387	232	199	34.9	2780
4 x 70 SM	0.268	232	199	34.9	2990
5 x 70 RM	0.268	164	140	39.9	4320
3 x 95 + 70 SM/RM	0.198 / 0.268	280	246	39.3	3830
3 x 95 + 50 SM/RM	0.198 / 0.387	280	246	39.3	3640
4 x 95 SM	0.198	280	246	39.3	4100
5 x 95 RM	0.198	197	173	46.0	5935
3 x 120 + 50 SM/RM	0.153 / 0.387	318	285	43.0	4350
3 x 120 + 70 SM/RM	0.153 / 0.268	318	285	43.0	4540
4 x 120 SM	0.153	318	285	43.0	5035
5 x 120 RM	0.153	223	200	43.3	6260
3 x 150 + 70 SM/RM	0.124 / 0.268	359	326	46.8	5410
4 x 150 SM	0.124	359	326	46.8	6190
3 x 185 + 95 SM/RM	0.102 / 0.198	406	374	49.8	6890
4 x 185 SM	0.102	406	374	49.8	7760
3 x 240 + 120 SM/RM	0.075 / 0.153	473	445	56.4	8840
4 x 240 SM	0.075	473	445	56.4	10055

CONTACT PERSON

Vojtěch Cuřin
Product Supervisor
+420 731 226 023
vojtech.curin@prakab.com

