
We Make Modern
Life Possible.

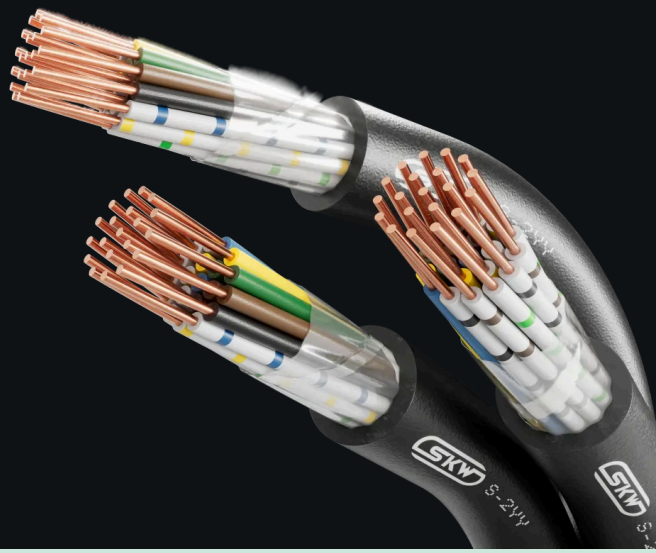

RAILWAY SIGNALLING CABLES

S-2YY

PE/PVC railway signalling cable, unscreened

Safety and control cable for fixed installation in railway installations.

TECHNICAL DATA

Standard
ÖVE-K 10, ÖVE-K 12

Test Voltage
3.5 kV

Rated Voltage
800 V

Bending radius (min.)
7,5 x Ø des Kabels

Fire properties
EN 60332-1-2: flame retardant

Core identification
ÖVE-K 12

Temperature range
Laying temperature: min. -5°C
Operating temperature: -30°C up to 60°C
Conductor temperature: max. 80°C

DESIGN



Number of cores x nominal cross-section (mm^2)	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
4 x 1,5	10.1	157	1000 T
4 x 2,5	11.5	204	1000 T
4 x 4	11.5	278	1000 T
10 x 1.5	14.0	279	1000 T
12 x 2,5	17.0	474	1000 T
16 x 2,5	18.9	603	1000 T
16 x 4	21.9	919	1000 T
20 x 1,5	18.0	480	1000 T
20 x 6	26.0	1536	1000 T
50 x 1,5	28.0	1111	1000 T
80 x 1,5	31.3	1685	1000 T

Technical changes reserved. All figures are therefore without guarantee.

CONTACT PERSON

Natalia Dikovits
Sales
+43 (0) 1 70170-120
natalia.dikovits@skw.at

