
We Make Modern
Life Possible.

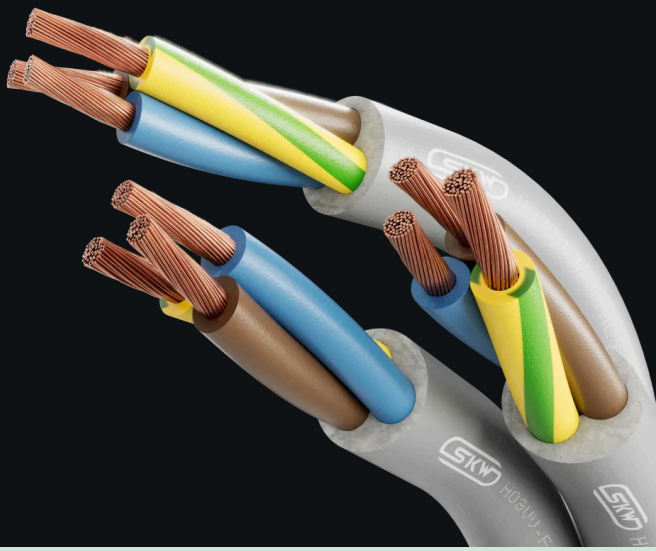

PVC AND RUBBER CABLES AND WIRES

H03VV-F (YML)

PVC flexible cable

Suitable for low mechanical stress in households and offices as well for household appliances. Not suitable for outdoor installation, in commercial establishments or for the connection of commercially used power tools.

TECHNICAL DATA

Standard
EN 50525-2-11

Certificate
ÖVE Austria

Test Voltage
2 kV / 50 Hz

Rated Voltage
300/300 V (Uo/U)


Bending radius (min.)
3 x Ø of cable

Fire properties
EN 60332-1-2: flame retardant and self-extinguishing
CPR classification: Eca

Core identification
HD 308 S2

Temperature range
Laying temperature: min. 5°C
Operating temperature: 5°C up to 50°C
Conductor temperature: max. 60°C
Short circuit temperature: max. 150°C

DESIGN

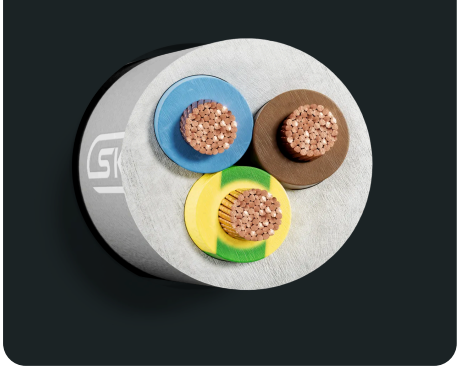

Number of cores x nominal cross-section (mm²)	Max. conductor resistance (Ω/km)	Outer diameter appr. (mm)	Total weight appr. (kg/km)	Standard lengths/packing (m)
2 x 0.5	39.0	4.7	39	50 R, 100 R
3 G 0,5	39.0	5.0	46	50 R, 100 R
5 G 0,5	39.0	6.5	65	50 R, 100 R
2 x 0,75	26.0	5.3	46	50 R, 100 R
3 G 0,75	26.0	5.5	55	50 R, 100 R, 500 SP
4 G 0,75	26.0	6.1	70	50 R, 100 R
5 G 0,75	26.0	6.8	83	50 R, 100 R
2 x 1	19.5	5.5	51	50 R, 100 R, 500 SP
3 x 1	19.5	5.9	62	50 R, 100 R
3 G 1	19.5	5.9	62	50 R, 100 R
4 G 1	19.5	6.5	75	500 SP, 1000 SP

Technical changes reserved. All figures are therefore without guarantee.

CONTACT PERSON

Natalia Dikovits
Sales
+43 (0) 1 70170-120
natalia.dikovits@skw.at

