
PRAKAB

We Make Modern Life Possible.

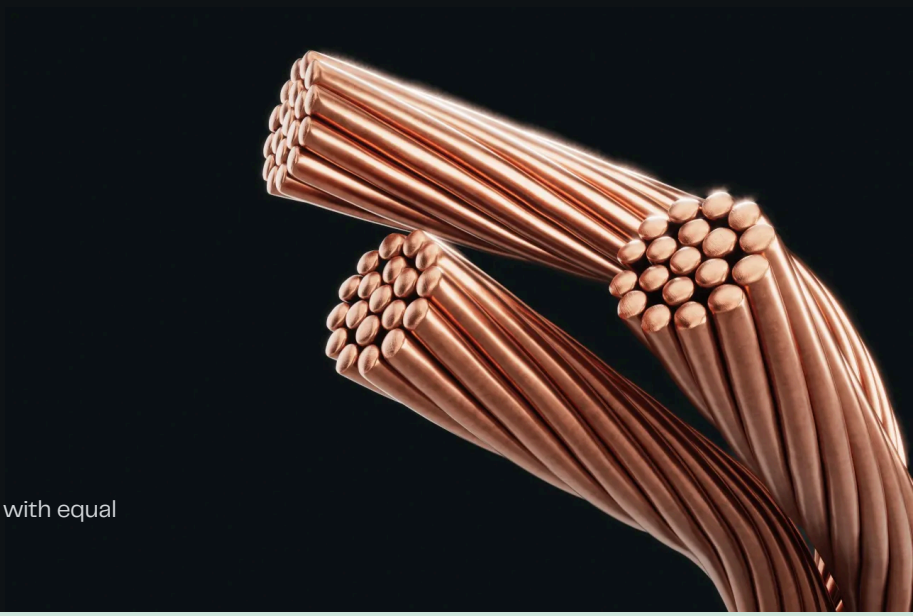

CONDUCTORS

Cu rope, RMn, hard, BS

Cu rope, hard, non-compressed


Conductors are designed for connection of points with equal electric potential or for high currents.

TECHNICAL DATA

Standard
BS 7884

Bending radius (min.)
15 x Ø rope

DESIGN

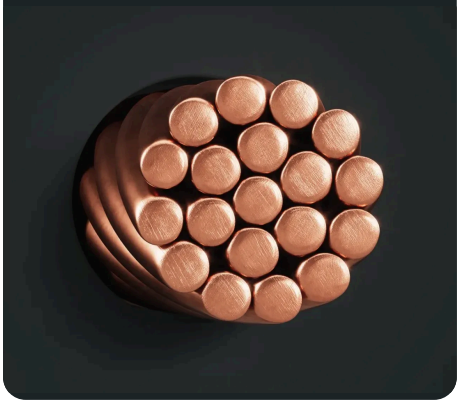

1. Copper wires, bare, hard
2. Stranded, round, non-compressed

Cu rope, RMn, hard, BS
Cu rope, hard, non-compressed

Conductor cross section (mm²)	Number of wires in the rope	Direction of outer layer	Max. conductor resistance (Ω/km)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
10	7	right (Z)	1.829	4.1	90
14	7	right (Z)	1.303	4.8	130
16	3	right (Z)	1.106	5.7	150
16	7	right (Z)	1.154	5.1	145
25	7	right (Z)	0.756	6.3	220
32	3	right (Z)	0.552	8.1	300
32	7	right (Z)	0.55	7.5	300
35	7	right (Z)	0.534	7.5	310
50	7	right (Z)	0.382	9.0	440
70	19	right (Z)	0.281	10.5	595
95	19	right (Z)	0.198	12.5	845
100	7	right (Z)	0.181	12.9	915
120	19	right (Z)	0.158	14.0	1055
125	19	right (Z)	0.147	14.5	1135
150	19	right (Z)	0.121	16.2	1410
185	19	right (Z)	0.098	17.8	1705

Technical changes reserved. All figures are therefore without guarantee.

CONTACT PERSON

Vojtěch Cuřín
Product Supervisor
+420 731 226 023
vojtech.curin@prakab.com

