
We Make Modern
Life Possible.

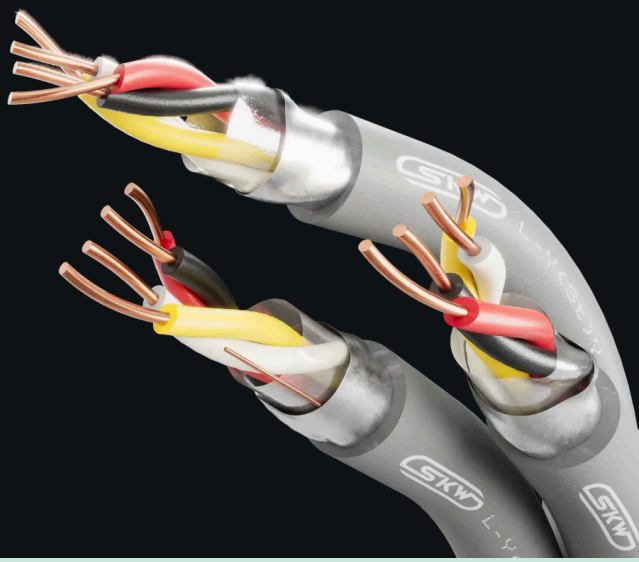

CONTROL AND ELECTRONIC CABLES

J-Y(St)Y EIB BUS

Motor power supply cable for EIB-Bus, halogen-free, screened

For installation on and under plaster in dry, damp and wet locations, as a BUS cable (EIB installation bus) and as a measuring and control cable in power installations.

TECHNICAL DATA

Standard
adapted to DIN VDE 0815


Test Voltage
4 kV/50 Hz (core/screen)

Fire properties
CPR classification: Eca

Core identification
1st. circuite: red (a), black (b) 2nd. circuite: white (a), yelow (b)

Temperature range
Laying temperature: min. -5°C
Conductor temperature: max. 70°C

DESIGN

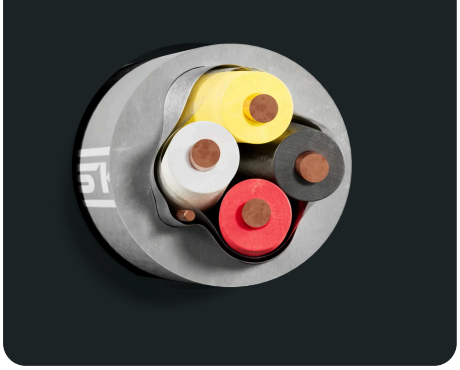

Outer diameter appr. (mm)	Total weight appr. (kg/km)	Number of cores x conductor diameter	Standard lengths/packing (m)
6,2	64	2	50 R, 100 R, 500 SP, 1000 SP

Technical changes reserved. All figures are therefore without guarantee.

CONTACT PERSON

Natalia Dikovits
Sales
+43 (0) 1 70170-120
natalia.dikovits@skw.at

