
PRAKAB

We Make Modern Life Possible.

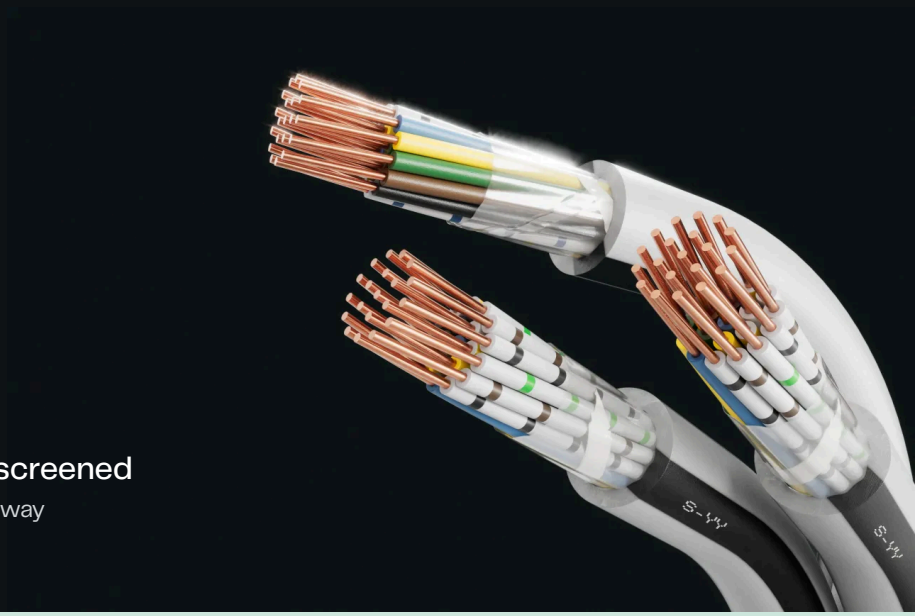

S-YY

PVC/PVC railway signalling cable, unscreened

Safety and control cable for fixed installation in railway installations.

TECHNICAL DATA

Standard
ÖVE-K 12

Test Voltage
core/core 2,5 kV / 50 Hz

Bending radius (min.)
7,5 x Ø of cable

Fire properties
EN 60332-1-2: flame retardant

Core identification
ÖVE-K 12

Temperature range
Laying temperature: min. -5°C
Operating temperature: -30°C up to 60°C
Conductor temperature: max. 70°C

DESIGN



1. Copper conductor, round solid (RE)
2. Core insulation (PVC)
3. Inner covering (plastic tape)
4. Sheath (PVC grey RAL 7035 with black stripes)

Number of cores x nominal cross-section (mm^2)	Standard lengths/packing (m)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
30 x 0,6	1000 T	10,7	176
60 x 0,6	1000 T	14,9	347
10 x 1	1000 T	9,9	148
30 x 1	1000 T	14,9	394
20 x 0,6	1000 T	9,1	124

Technical changes reserved. All figures are therefore without guarantee.



CONTACT PERSON

Ing. Štěpán Laštůvka
Product Supervisor
+420 732 912 682
stepan.lastuvka@prakab.com