
KONEKA

We Make Modern Life Possible.

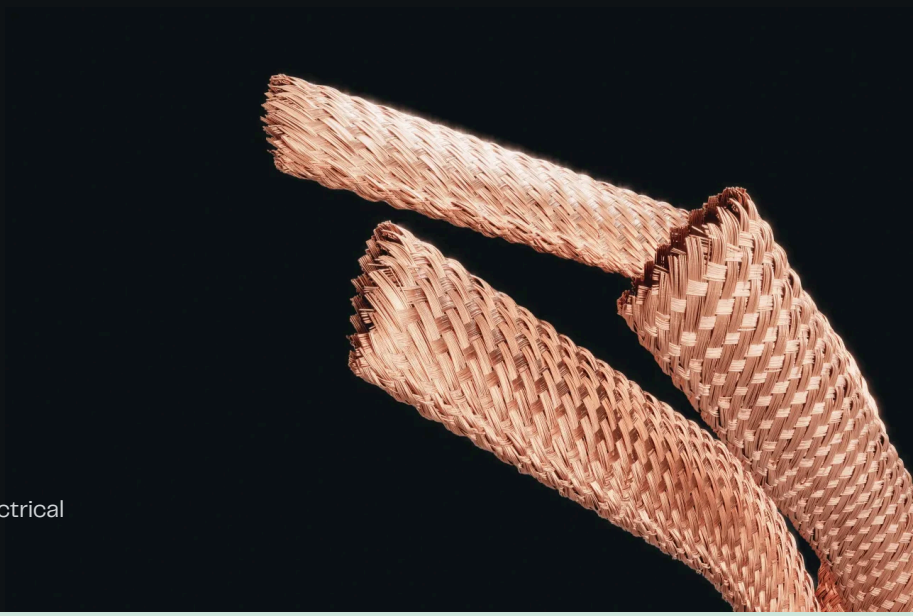

CONDUCTORS

Copper wire braidings, flat


Bare copper braidings, flat

Conductors are used for flexible connection of electrical equipments and for earthing applications

TECHNICAL DATA

Standard
TP PRAKAB 11/02

DESIGN

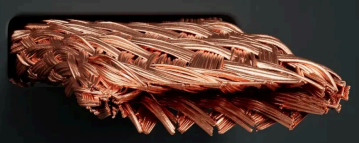

Copper wire braidings, flat

Bare copper braidings, flat

Nominal cross-section (mm²)	Single wire diameter (mm)	Max. conductor resistance (Ω/km)	Width of flatted conductor (mm)	Height of flatted conductor (mm)	Total weight appr. (kg/km)
6	0.071	3.248	8.5	0.9	55
10	0.071	1.949	11.5	1.2	95
10	0.1	1.949	11.2	1.3	99
16	0.071	1.218	15.2	1.4	145
16	0.1	1.218	15.5	1.5	155
20	0.071	0.974	16.8	1.7	195
25	0.071	0.78	19	1.9	245
25	0.1	0.78	20	2	250
25	0.2	0.78	22	1.6	218
35	0.071	0.557	21.5	2.4	365
35	0.1	0.557	24	2.2	335
35	0.2	0.557	24.5	2.4	345
50	0.1	0.39	28.5	2.8	525
50	0.2	0.39	31	2.7	500
70	0.2	0.278	35	3.8	700

Technical changes reserved. All figures are therefore without guarantee.

CONTACT PERSON

Jan Pietroň
Key Account Manager
+420 604 471 907
jan.pietron@koneka.cz

