
KONEKA

We Make Modern Life Possible.

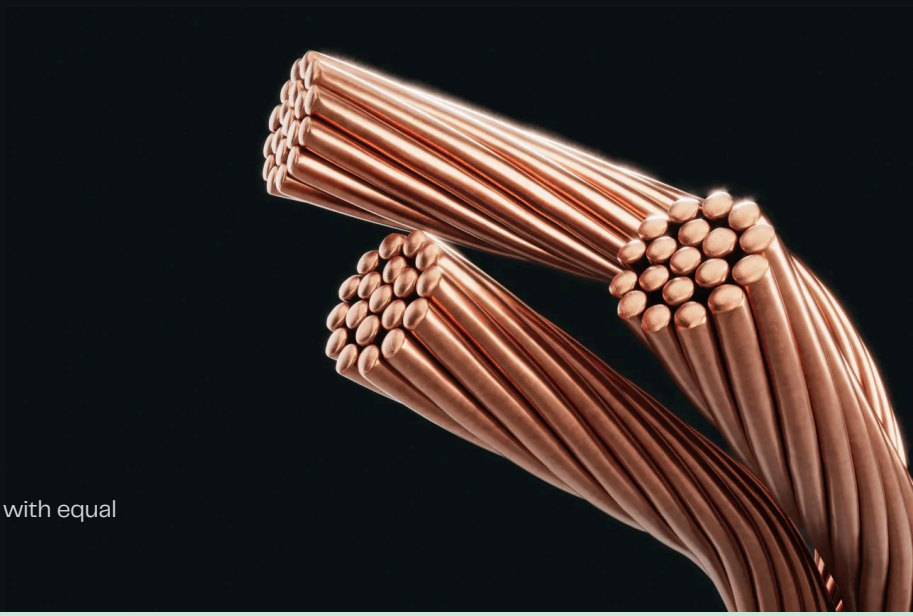

CONDUCTORS

Cu rope, RMn, hard, BS

Cu rope, hard, non-compressed


Conductors are designed for connection of points with equal electric potential or for high currents.

TECHNICAL DATA

Standard
BS 7884

Bending radius (min.)
15 x Ø rope

DESIGN

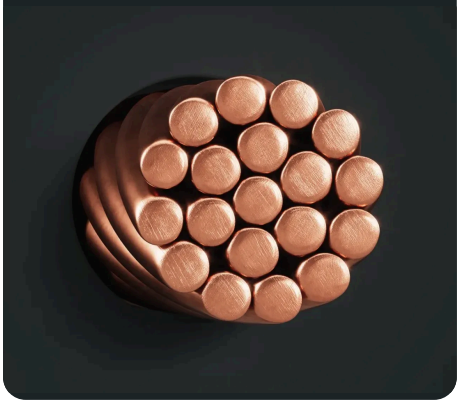

Cu rope, RMn, hard, BS
Cu rope, hard, non-compressed

Conductor cross section (mm²)	Number of wires in the rope	Direction of outer layer	Max. conductor resistance (Ω/km)	Outer diameter appr. (mm)	Total weight appr. (kg/km)
10	7	right (Z)	1.829	4.1	90
14	7	right (Z)	1.303	4.8	130
16	3	right (Z)	1.106	5.7	150
16	7	right (Z)	1.154	5.1	145
25	7	right (Z)	0.756	6.3	220
32	3	right (Z)	0.552	8.1	300
32	7	right (Z)	0.55	7.5	300
35	7	right (Z)	0.534	7.5	310
50	7	right (Z)	0.382	9.0	440
70	19	right (Z)	0.281	10.5	595
95	19	right (Z)	0.198	12.5	845
100	7	right (Z)	0.181	12.9	915
120	19	right (Z)	0.158	14.0	1055
125	19	right (Z)	0.147	14.5	1135
150	37	right (Z)	0.126	15.8	1340
185	37	right (Z)	0.102	17.5	1650

Technical changes reserved. All figures are therefore without guarantee.



CONTACT PERSON

Jan Pietroň
Key Account Manager
+420 604 471 907
jan.pietron@koneka.cz